

SUPERWINCH

BY WESTIN

ENGINEERED FOR ENTHUSIASTS



TALON SERIES / TIGER SHARK SERIES / LP SERIES / S SERIES / LT SERIES / UT 3000 / TERRA SERIES / WINCH 2 GO

2019 PRODUCT CATALOG

WESTIN

SUPERWINCH

BY WESTIN

ENGINEERED FOR ENTHUSIASTS

WHETHER YOU WINCH TO GET AWAY OR WINCH TO GET BACK HOME SAFELY, WE'RE PUSHING THE BOUNDARIES OF MODERN WINCHING FROM OUR NEW HEADQUARTERS IN **SAN DIMAS, CALIFORNIA.**

WESTIN IS PLEASED TO ANNOUNCE THAT WE HAVE ADDED SUPERWINCH TO OUR FAMILY OF QUALITY AUTOMOTIVE PRODUCTS. SUPERWINCH HAS BEEN A GLOBAL MARKET LEADER AND MANUFACTURER OF ELECTRIC AND HYDRAULIC WINCHES AND ACCESSORIES FOR OVER 45 YEARS AND THE TRADITION WILL NOW CONTINUE. THE SUPERWINCH BRAND IS SYNONYMOUS WITH QUALITY, DURABILITY AND INNOVATION AND HAS A LOYAL FOLLOWING AMONG OFF-ROAD ENTHUSIASTS, AGRICULTURAL, MILITARY AND INDUSTRIAL USERS ALIKE.

SUPERWINCH HAS MAINTAINED AN OUTSTANDING REPUTATION WITHIN THE MARKETPLACE BASED UPON THEIR SUPERIOR DESIGN, RELIABILITY AND VALUE. THE BRAND INCLUDES A WIDE RANGE OF CONSUMER AND INDUSTRIAL WINCH PRODUCTS, INCLUDING ELECTRIC WINCHES, POWER DRIVES, HYDRAULIC WINCHES AND RECOVERY ACCESSORIES. WESTIN PLANS TO EXPAND UPON THE CURRENT SUPERWINCH PRODUCT OFFERINGS, WITH NEW DESIGNS IN THE FUTURE WHILE PROVIDING DISTRIBUTORS WITH ADDITIONAL ADDED VALUE THROUGH OUR COMPREHENSIVE LINE OF WINCH CAPABLE PRODUCTS (SUCH AS HDX GRILLE GUARDS AND BUMPERS, MAX MOUNT SYSTEMS AND JEEP PRODUCTS).

WE INVITE YOU TO FOLLOW UP ON OUR WEBSITE: **SUPERWINCH.COM** WHERE WE'VE STASHED VIDEOS OF WINCHING USE, TOOLS AND ACCESSORIES TO HELP YOU GET THE MOST OUT OF YOUR WINCH.



CHOOSE THE RIGHT WINCH FOR YOU

TALON SERIES

TALON 9.5 WINCH	5
TALON 9.5SR WINCH	5
TALON 9.5i WINCH	6
TALON 9.5iSR WINCH	6
TALON 12.5 WINCH	7
TALON 12.5SR WINCH	7
TALON 18 WINCH	8
TALON 18SR WINCH	8

TIGER SHARK SERIES

TIGER SHARK 9500 WINCH	10
TIGER SHARK 11500 WINCH	10
TIGER SHARK 9500SR WINCH	11
TIGER SHARK 11500SR WINCH	11
TIGER SHARK 13500 WINCH	12
TIGER SHARK 15500 WINCH	12
TIGER SHARK 17500 WINCH	13

LP SERIES

LP 85000 WINCH	15
LP 10000 WINCH	15

S SERIES

S 5500 WINCH	17
S 5500SR WINCH	17
S 7500 WINCH	19
S 7500SR WINCH	19

LT SERIES AND UT WINCH

LT 2000 WINCH	21
LT 3000 WINCH	21
LT 4000 WINCH	22
LT 4000SR WINCH	22
UT 3000 WINCH	23

TERRA SERIES

TERRA 25 WINCH	25
TERRA 25SR WINCH	25
TERRA 35 WINCH	26
TERRA 35SR WINCH	26
TERRA 45 WINCH	27
TERRA 45SR WINCH	27

WINCH2GO SERIES

WINCH2GO STEEL ROPE	29
WINCH2GO SR	29

RECOVERY ACCESSORIES

WESTIN RECOVERY ACCESSORIES	31
WESTIN ATV ACCESSORIES	31

WINCH MOUNT PRODUCTS

HDX WINCH MOUNT GRILLE GUARD	33
MAX WINCH TRAY MOUNTING SYSTEM	33
RECEIVER MOUNT, JEEP TJ AND JK MOUNT	33
WJ2 STUBBY BUMPER	33
WJ2 FULL WIDTH FRONT BUMPER	33

TALON SERIES

9500 WINCH / 12500 WINCH / 18000 WINCH





TALON 9.5

STEEL CABLE

NO ONE LIKES WAITING ON A SLOW WINCH; THE SUPERWINCH TALON 9.5 COMBINES SUPER FAST LINE SPEED DURING CABLE RETRIEVAL, WITH OUTSTANDING PULLING POWER AND STOUT 2-STAGE PLANETARY GEARS FOR STEADY AND PREDICTABLE OPERATION. THE INNOVATIVE EXTERNAL DISC BRAKE DESIGN PROVIDES 100% LOAD HOLD WHEN RUNNING THE BRAKE HARD. THE STAINLESS STEEL ROLLERS STAND UP TO WEATHER AND REDUCE DRAG AND WIRE ROPE ABRASION. TALON ALSO FEATURES EASY OPERATION "PULL AND TURN" CLUTCH ENGAGEMENT. TALON HAS IT ALL SPEED, POWER AND DURABLE PERFORMANCE.



PART NO. 1695200

FEATURES:

- RATED LINE PULL OF 9,500 LBS
- 5.2 HP SEALED MOTOR
- AUTOMATIC LOAD HOLDING EXTERNAL DISC BRAKE DESIGN LOCATED OUTSIDE THE DRUM
- ERGONOMIC FREE SPOOL HNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- WIRE ROPE MEASURES 3/8" x 85'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOD
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

SPECIFICATIONS	
SOLENOID	VS4 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	90 (41)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	430
	LINE SPEED FPM (MPM)	5.0 (1.5)

TALON 9.5SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 9,500 LBS
- 5.2 HP SEALED MOTOR
- AUTOMATIC 100% LOAD HOLDING DISC BRAKE IS LOCATED OUTSIDE THE DRUM
- BRAKE MINIMIZES HEAT TRANSFER TO RETAIN SYNTHETIC ROPE INTEGRITY
- ERGONOMIC FREE SPOOL HNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- CERTIFIED DYNEEMA SYNTHETIC ROPE MEASURES 3/8" x 80'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOD
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1695201

SPECIFICATIONS	
SOLENOID	VS4 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	59 (26.7)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	430
	LINE SPEED FPM (MPM)	5.0 (1.5)

For California Residents Only-Prop. 65 Warning
WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov



TALON 9.5i

INTEGRATED WITH STEEL CABLE



PART NO. 1695210

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	92 (42)

FEATURES:

- RATED LINE PULL OF 9,500 LBS
- INTEGRATED 5.2 HP SEALED MOTOR
- AUTOMATIC LOAD HOLDING EXTERNAL DISC BRAKE DESIGN LOCATED OUTSIDE THE DRUM
- ERGONOMIC FREE SPOOL KNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY BEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- WIRE ROPE MEASURES 3/8" x 85'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOK
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- CAN BE MOUNTED FOOT DOWN OR FOOT FORWARD PROVIDING MULTIPLE MOUNTING OPTIONS

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PERFORMANCE		
NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	410
	LINE SPEED FPM (MPM)	2 (0.6)

TALON 9.5iSR

INTEGRATED WITH SYNTHETIC ROPE



PART NO. 1695211

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	67 (30)

FEATURES:

- RATED LINE PULL OF 9,500 LBS
- INTEGRATED 5.2 HP SEALED MOTOR
- AUTOMATIC 100% LOAD HOLDING DISC BRAKE IS LOCATED OUTSIDE THE DRUM
- BRAKE MINIMIZES HEAT TRANSFER TO RETAIN SYNTHETIC ROPE INTEGRITY
- ERGONOMIC FREE SPOOL KNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY BEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- CERTIFIED DYNEEMA SYNTHETIC ROPE MEASURES 3/8" x 85'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOK
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	430
	LINE SPEED FPM (MPM)	5.0 (1.5)





TALON 12.5

STEEL CABLE



FEATURES:

- RATED LINE PULL OF 12,500 LBS
- 6.0 HP SEALED MOTOR
- AUTOMATIC LOAD HOLDING EXTERNAL DISC BRAKE DESIGN LOCATED OUTSIDE THE DRUM
- ERGONOMIC FREE SPOOL KNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- WIRE ROPE MEASURES 3/8" x 85'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOK
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1612200

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	95 (43)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	530
	LINE SPEED FPM (MPM)	3.25 (0.99)

TALON 12.5SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 12,500 LBS
- 6.0 HP SEALED MOTOR
- AUTOMATIC 100% LOAD HOLDING DISC BRAKE IS LOCATED OUTSIDE THE DRUM
- BRAKE MINIMIZES HEAT TRANSFER TO RETAIN SYNTHETIC ROPE INTEGRITY
- ERGONOMIC FREE SPOOL KNOB LIFTS AND TURNS EFFORTLESSLY
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 148:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- CERTIFIED DYNEEMA SYNTHETIC ROPE MEASURES 3/8" x 80'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOK
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- 62 FPM NO LOAD LINE SPEED
- IP 67 RATED AGAINST DUST AND MOISTURE
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1612201

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	68 (31)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	530
	LINE SPEED FPM (MPM)	3.25 (0.99)



TALON 18

STEEL CABLE

SPEED AND POWER MAKE OUR TOUGH HEAVY DUTY LARGE FRAME TALON 18 IDEAL FOR RECOVERY AND SUPER DUTY APPLICATIONS. COMBINE OUTSTANDING SPEED AND DURABILITY WITH A WORK HORSE HEAVY DUTY 6.0 HP SEALED MOTOR PROVIDING 18,000 LBS OF PULLING POWER. FEATURES STAINLESS STEEL ROLLERS DESIGNED TO STAND UP TO WEATHER AND REDUCE DRAG AND WIRE ROPE ABRASION. AUTOMATIC, LOAD HOLDING EXTERNAL DISC BRAKE LOCATED OUTSIDE THE DRUM, TO REDUCE HEAT AND WEAR. GET THE TALON 18 WINCH ADVANTAGE.



FEATURES:

- RATED LINE PULL OF 18,000 LBS
- FEATURES A GEAR SET OVER 45MM WIDE FOR POSITIVE ENGAGEMENT AND LONGEVITY
- 6.0 HP SEALED MOTOR
- AUTOMATIC LOAD HOLDING EXTERNAL DISC BRAKE DESIGN LOCATED OUTSIDE THE DRUM
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 346:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 1/2" x 90'
- HEAVY DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- IP 67 RATED AGAINST DUST AND MOISTURE

PART NO. 1618200

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

SPECIFICATIONS

SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	1/2" (13)
WEIGHT INSTALLED LBS (KG)	172 (78)

PERFORMANCE

NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	25 (7.62)
AT LOAD	AMPS	415
	LINE SPEED FPM (MPM)	2.5 (0.76)

TALON 18SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 18,000 LBS
- FEATURES A GEAR SET OVER 45MM WIDE FOR POSITIVE ENGAGEMENT AND LONGEVITY
- 6.0 HP SEALED MOTOR
- AUTOMATIC 100% LOAD HOLDING DISC BRAKE IS LOCATED OUTSIDE THE DRUM
- BRAKE MINIMIZES HEAT TRANSFER TO RETAIN SYNTHETIC ROPE INTEGRITY
- 2-STAGE SPUR/2-STAGE PLANETARY GEARING WITH 346:1 RATIO
- SEALED SUBMERSIBLE VENTED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- CERTIFIED DYNEEMA SYNTHETIC ROPE MEASURES 1/2" x 90'
- HEAVY DUTY, CLEVIS HALF LINK, PINNED HOOK
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 15' ERGO HANDHELD REMOTE CONTROL WITH COILED CABLE AND LED LIGHT INDICATORS
- IP 67 RATED AGAINST DUST AND MOISTURE

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1618201

SPECIFICATIONS

SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	1/2" (13)
WEIGHT INSTALLED LBS (KG)	147 (66)

PERFORMANCE

NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	25 (7.62)
AT LOAD	AMPS	415
	LINE SPEED FPM (MPM)	2.5 (0.76)



TIGER SHARK

9500 WINCH / 11500 WINCH / 13500 WINCH / 15500 WINCH / 17500 WINCH



For California Residents Only-Prop. 65 Warning

WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov



TIGER SHARK 9500

STEEL CABLE

ONE OF SUPERWINCH'S MOST POPULAR WINCHES, THE TIGER SHARK 9500 IS THE BENCHMARK FOR PERFORMANCE WINCHING WHILE NOT BREAKING THE BANK. FROM POWERFUL MOTORS, TO STRONG GEARS, TO LONG-LIFE STAINLESS STEEL PARTS, THE TIGER SHARK 9500 STANDS OUT FROM THE COMPETITION. IT IS EASY TO SEE WHY THE TIGER SHARK REMAINS ONE OF SUPERWINCH'S MOST POPULAR WINCHES YEAR AFTER YEAR.



FEATURES:

- RATED LINE PULL OF 9,500 LBS
- 5.2 HP MOTOR
- 3-STAGE PLANETARY GEARING WITH 218:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 21/64" x 95'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL
- STAINLESS STEEL TIEBARS

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1595200

SPECIFICATIONS

SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	21/64" (8.3)
WEIGHT INSTALLED LBS (KG)	90 (41)

PERFORMANCE

NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	340
	LINE SPEED FPM (MPM)	4 (1.2)

TIGER SHARK 11500

STEEL CABLE



FEATURES:

- RATED LINE PULL OF 11,500 LBS
- 6.0 HP MOTOR
- 3-STAGE PLANETARY GEARING WITH 218:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 3/8" x 84'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1511200

SPECIFICATIONS

SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	94 (42)

PERFORMANCE

NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	410
	LINE SPEED FPM (MPM)	2 (0.6)





TIGER SHARK 9500SR

SYNTHETIC ROPE

ONE OF SUPERWINCH'S MOST POPULAR WINCHES, THE TIGER SHARK 9500 WINCH SYNTHETIC MODELS COME STANDARD WITH AN AUTOMATIC LOAD HOLDING BRAKE, BETTER DRUMS (THICKER, FABRICATED STEEL), AND STAINLESS STEEL HARDWARE AND TIEBARS. DOLLAR FOR DOLLAR, THERE'S NO BETTER WINCH THAN THE SUPERWINCH TIGER SHARK.



PART NO. 1595201

FEATURES:

- RATED LINE PULL OF 9,500 LBS
- 5.2 HP MOTOR
- 3-STAGE PLANETARY GEARING WITH 218:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- SYNTHETIC ROPE MEASURES 3/8" x 80'
- AUTOMATIC LOAD HOLDING BRAKE DESIGN
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- ALUMINUM HAWSE FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL
- STAINLESS STEEL TIEBARS

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

SPECIFICATIONS	
SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/8" (8.3)
WEIGHT INSTALLED LBS (KG)	59 (26.7)

PERFORMANCE		
NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	340
	LINE SPEED FPM (MPM)	4 (1.2)

TIGER SHARK 11500SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 11,500 LBS
- 6.0 HP MOTOR
- 3-STAGE PLANETARY GEARING WITH 218:1 RATIO
- WEATHER SEALED SOLENOID TO REDUCE DAMAGE FROM THE ELEMENTS
- ERGONOMIC PULL AND TURN FREESPOOL
- SYNTHETIC ROPE MEASURES 3/8" x 80'
- AUTOMATIC LOAD HOLDING BRAKE DESIGN
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- ALUMINUM HAWSE FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1511201

SPECIFICATIONS	
SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	59 (26.7)

PERFORMANCE		
NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	410
	LINE SPEED FPM (MPM)	2 (0.6)



TIGER SHARK 13500

STEEL CABLE

A GREAT SOLUTION FOR EFFICIENT AND RELIABLE TOWING WITH HEAVIER LOADS. SUPERWINCH TIGER SHARK 13500 ROBUST CHASSIS ADDS MORE PULLING POWER WITHOUT BREAKING THE BANK. FROM POWERFUL MOTORS, TO STRONG GEARS, TO LONG-LIFE STAINLESS STEEL PARTS, THE TIGER SHARK 13500 IS A STANDOUT CHOICE. IT IS EASY TO SEE WHY THIS REMAINS ONE OF SUPERWINCH'S MOST POPULAR WINCHES YEAR AFTER YEAR.



FEATURES:

- RATED LINE PULL OF 13,500 LBS
- 5.3 HP MOTOR
- 4-STAGE PLANETARY GEARING WITH 518:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 13/32" x 95'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1513200

SPECIFICATIONS


SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	13/32" (10.3)
WEIGHT INSTALLED LBS (KG)	134 (60.7)

PERFORMANCE

NO LOAD	AMPS	120
	LINE SPEED FPM (MPM)	11 (3.4)
AT LOAD	AMPS	440
	LINE SPEED FPM (MPM)	4 (1.2)

TIGER SHARK 15500

STEEL CABLE

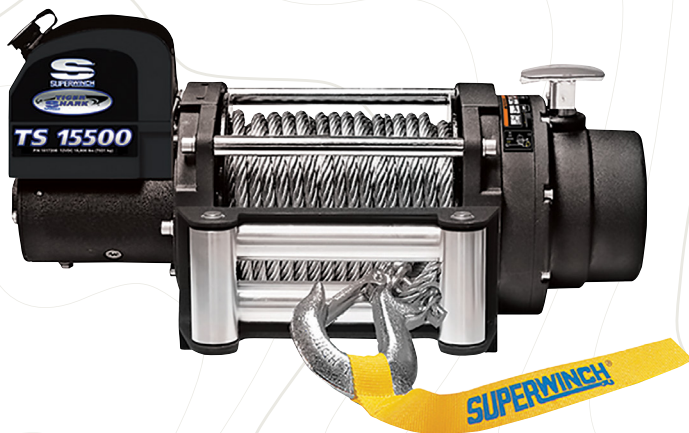

FEATURES:

- RATED LINE PULL OF 15,500 LBS
- 5.7 HP MOTOR
- 4-STAGE PLANETARY GEARING WITH 518:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 29/64" x 92'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1515200

SPECIFICATIONS

SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	29/64" (11.5)
WEIGHT INSTALLED LBS (KG)	140 (63.5)

PERFORMANCE

NO LOAD	AMPS	120
	LINE SPEED FPM (MPM)	11 (3.4)
AT LOAD	AMPS	440
	LINE SPEED FPM (MPM)	3.5 (1)





TIGER SHARK 11500SR SYNTHETIC WINCH
SHOWN ON HDX WINCH MOUNT GRILLE GUARD



TIGER SHARK 17500

STEEL CABLE



FEATURES:

- RATED LINE PULL OF 17,500 LBS
- 6.5 HP MOTOR
- 4-STAGE PLANETARY GEARING WITH 518:1 RATIO
- WEATHER SEALED SOLENOID
- ERGONOMIC PULL AND TURN FREESPOOL
- WIRE ROPE MEASURES 1/2" X 90'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL 4-WAY ROLLER FAIRLEAD
- RUGGED HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1517200

SPECIFICATIONS	
SOLENOID	WEATHER SEALED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	1/2" (12.7)
WEIGHT INSTALLED LBS (KG)	150 (68)

PERFORMANCE		
NO LOAD	AMPS	120
	LINE SPEED FPM (MPM)	11 (3.4)
AT LOAD	AMPS	440
	LINE SPEED FPM (MPM)	2.8 (0.85)

For California Residents Only-Prop. 65 Warning
WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov

LP SERIES

8500 WINCH / 10000 WINCH

SUPERWINCH'S LP8500 AND LP10000 WINCHES ARE DESIGNED TO ACCOMMODATE ENTRY-LEVEL BUYERS SHOPPING FOR EXCELLENT VALUE. FULFILLING THE RUGGED DEMANDS OF OFF-ROAD AND UTILITY USE, THE LP8500 AND LP10000 INTRODUCES PRICE-CONSCIOUS BUYERS TO THE QUALITY, POWER AND PERFORMANCE ADVANTAGES OF THE SUPERWINCH BRAND.



LP 8500

STEEL CABLE

SUPERWINCH'S LP8500 WINCHES ARE DESIGNED TO ACCOMMODATE ENTRY-LEVEL BUYERS SHOPPING FOR EXCELLENT VALUE. ENGINEERED TO HANDLE A VARIETY OF AGRICULTURAL, RECREATIONAL, AND JOB SITE NEEDS. SUPERWINCH'S LP8500 WINCH IS A GREAT SOLUTION FOR MOST TRAILER MOUNTED WINCH NEEDS, DELIVERING LOAD ASSISTANCE AND RELIABILITY AT A GREAT PRICE.



FEATURES:

- RATED LINE PULL OF 8,500 LBS
- 4.5 HP SEALED MOTOR
- 3-STAGE PLANETARY GEARING WITH 235:1 RATIO
- SEALED SOLENOID
- TWIST AND TURN FREESPOOL CLUTCH LEVER
- WIRE ROPE MEASURES 5/16" x 95'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- STAINLESS STEEL HAWSE FAIRLEAD
- 12' RUBBER HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1585202

SPECIFICATIONS	
SOLENOID	SEALED WITH CIRCUIT BREAKER
BRAKE	AUTOMATIC/LOAD HOLDING
CABLE DIAMETER" (MM)	5/16" (7.9)
WEIGHT INSTALLED LBS (KG)	73 (33.11)

PERFORMANCE		
NO LOAD	AMPS	84
	LINE SPEED FPM (MPM)	18 (5.5)
AT LOAD	AMPS	320
	LINE SPEED FPM (MPM)	3.5 (1.1)

LP 10000

STEEL CABLE

THE LP 10,000 PROVIDES HEAVY DUTY FEATURES AT AN AFFORDABLE PRICE. WITH A 5.1 HP SEALED MOTOR AND UPGRADED COMPONENTS SUCH AS A ROLLER FAIRLEAD AND CLEVIS PINNED LATCHED HOOK, AND A SEALED SOLENOID WITH CIRCUIT BREAKER. THIS WINCH HAS MANY STANDARD FEATURES INCLUDED ON MUCH MORE EXPENSIVE 10,000 LBS WINCHES.



FEATURES:

- RATED LINE PULL OF 10,000 LBS
- 5.1 HP SEALED MOTOR
- 3-STAGE PLANETARY GEARING WITH 235:1 RATIO
- SEALED SOLENOID
- TWIST AND TURN FREESPOOL CLUTCH LEVER
- WIRE ROPE MEASURES 3/8" x 85'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- ZINC PLATED 4-WAY ROLLER FAIRLEAD
- 12' RUBBER HANDHELD REMOTE CONTROL

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1510200

SPECIFICATIONS	
SOLENOID	SEALED WITH CIRCUIT BREAKER
BRAKE	AUTOMATIC/LOAD HOLDING
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	83 (37.64)

PERFORMANCE		
NO LOAD	AMPS	90
	LINE SPEED FPM (MPM)	16 (4.87)
AT LOAD	AMPS	350
	LINE SPEED FPM (MPM)	1.52 (0.46)

S SERIES

5500 WINCH

MOST POWERFUL TRAILER WINCH EVER. REDESIGNED FROM THE GROUND UP, THE NEW S CONTINUES SUPERWINCH'S DOMINANCE AS THE ONLY TRAILER WINCH MANUFACTURER. SMART FEATURES LIKE A FOOT OPERABLE FREESPOOL CLUTCH, SOCKET ON TOP FOR EASY ACCESS, AND AN INSTANT-STOP MOTOR FOR PRECISION TRAILER WINCHING. AVAILABLE IN STEEL OR SYNTHETIC ROPE.



\$ 5500 STEEL CABLE

THE \$5500 WINCH CONTINUES SUPERWINCH'S DOMINANCE AS THE LEADER IN TRAILER-SPECIFIC WINCHING. THE \$5500 TRAILER WINCH EASILY PULLS 5,500 LBS POWERED BY ITS 3.6 HP PERMANENT MAGNET MOTOR, AND ITS ALL STEEL 3-STAGE PLANETARY GEAR BOX. THE \$5500 INCLUDES A SAFETY TINTED PROTECTIVE COVER WHICH PROTECTS THE CABLE, DRUM AND OPERATORS FINGERS. THE MACHINED ALUMINUM FREE-SPOOL LEVER CAN ALSO BE OPERATED EASILY BY FOOT.



FEATURES:

- RATED LINE PULL OF 5,500 LBS
- 3.6 HP PERMANENT MAGNET MOTOR PROVIDES DYNAMIC BRAKING
- 3-STAGE PLANETARY GEARING WITH 159:1 RATIO
- SEALED SOLENOID
- LEVER STYLE FREESPOOL ALLOWS HAND OR FOOT OPERATION
- STEEL CUT GEARS FOR BETTER ENGAGEMENT AND LONGEVITY
- WIRE ROPE MEASURES 1/4" X 40'
- AUTOMATIC LOAD HOLDING BRAKE
- STAINLESS STEEL 2-WAY ROLLER FAIRLEAD

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1455200

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	90 (41)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	430
	LINE SPEED FPM (MPM)	5.0 (1.5)

\$ 5500SR SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 5,500 LBS
- 3.6 HP PERMANENT MAGNET MOTOR PROVIDES DYNAMIC BRAKING
- 3-STAGE PLANETARY GEARING WITH 159:1 RATIO
- SEALED SOLENOID
- LEVER STYLE FREESPOOL ALLOWS HAND OR FOOT OPERATION
- STEEL CUT GEARS FOR BETTER ENGAGEMENT AND LONGEVITY
- SYNTHETIC ROPE MEASURES 1/4" X 40'
- AUTOMATIC LOAD HOLDING BRAKE
- STAINLESS STEEL 2-WAY ROLLER FAIRLEAD

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1455201

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	92 (42)

PERFORMANCE		
NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	410
	LINE SPEED FPM (MPM)	2 (0.6)

S SERIES

7500 WINCH



MOST POWERFUL TRAILER WINCH EVER. REDESIGNED FROM THE GROUND UP, THE NEW S CONTINUES SUPERWINCH'S DOMINANCE AS THE LEADING TRAILER WINCH MANUFACTURER. SMART FEATURES LIKE A FOOT OPERABLE FREESPOOL CLUTCH AND AN INSTANT-STOP MOTOR FOR PRECISION TRAILER WINCHING. AVAILABLE IN STEEL OR SYNTHETIC ROPE.

\$ 7500

STEEL CABLE

THE 57500 WINCH PULLS 7,500 LBS WITH A 3.6 HP PERMANENT MAGNET MOTOR DRIVEN THROUGH AN ALL STEEL 3-STAGE PLANETARY GEAR BOX. THE TINTED PROTECTIVE COVER PROTECTS THE CABLE, DRUM AND OPERATORS FINGERS. MACHINED ALUMINUM FREE-SPOOL LEVER CAN BE EASILY OPERATED BY FOOT. INNOVATIVE 2-HOLE DRUM PREVENTS STEEL CABLE FROM DETACHING FROM DRUM.



FEATURES:

- RATED LINE PULL OF 7,500 LBS
- 3.6 HP PERMANENT MAGNET MOTOR PROVIDES DYNAMIC BRAKING
- 3-STAGE PLANETARY GEARING WITH 40:1 RATIO
- SEALED SOLENOID
- LEVER STYLE FREESPOOL ALLOWS HAND OR FOOT OPERATION
- STEEL CUT GEARS FOR BETTER ENGAGEMENT AND LONGEVITY
- WIRE ROPE MEASURES 5/16" x 54'
- AUTOMATIC LOAD HOLDING BRAKE
- STAINLESS STEEL 2-WAY ROLLER FAIRLEAD

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1475200

SPECIFICATIONS	
SOLENOID	VS4 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	90 (41)

PERFORMANCE		
NO LOAD	AMPS	75
	LINE SPEED FPM (MPM)	62 (18.9)
AT LOAD	AMPS	430
	LINE SPEED FPM (MPM)	5.0 (1.5)

\$ 7500SR

SYNTHETIC ROPE

THE 57500 WINCH SYNTHETIC PULLS 7,500 LBS WITH A 3.6 HP PERMANENT MAGNET MOTOR DRIVEN THROUGH AN ALL STEEL 3-STAGE PLANETARY GEAR BOX. THE TINTED PROTECTIVE COVER PROTECTS THE CABLE, DRUM AND OPERATORS FINGERS. MACHINED ALUMINUM FREE-SPOOL LEVER CAN BE EASILY OPERATED BY FOOT. INNOVATIVE 2-HOLE DRUM PREVENTS SYNTHETIC ROPE FROM DETACHING FROM DRUM.



FEATURES:

- RATED LINE PULL OF 7,500 LBS
- 3.6 HP PERMANENT MAGNET MOTOR PROVIDES DYNAMIC BRAKING
- 3-STAGE PLANETARY GEARING WITH 40:1 RATIO
- SEALED SOLENOID
- LEVER STYLE FREESPOOL ALLOWS HAND OR FOOT OPERATION
- STEEL CUT GEARS FOR BETTER ENGAGEMENT AND LONGEVITY
- SYNTHETIC ROPE MEASURES 5/16" x 54'
- AUTOMATIC LOAD HOLDING BRAKE
- STAINLESS STEEL 2-WAY FAIRLEAD

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1475201

SPECIFICATIONS	
SOLENOID	VS4 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, OUTSIDE DRUM
CABLE DIAMETER" (MM)	3/8" (9.5)
WEIGHT INSTALLED LBS (KG)	92 (42)

PERFORMANCE		
NO LOAD	AMPS	80
	LINE SPEED FPM (MPM)	19 (5.7)
AT LOAD	AMPS	410
	LINE SPEED FPM (MPM)	2 (0.6)

For California Residents Only-Prop. 65 Warning
WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov

LT SERIES

2000 WINCH / 3000 WINCH / 4000 WINCH

BUILT FOR ACTION, THE LT SERIES FROM SUPERWINCH PROVIDE AMAZING PULLING POWER FROM A SMALL WINCH. TRIED AND TRUE DESIGNS, PERFECTED OVER THE YEARS OFFER UNMATCHED DURABILITY AND PERFORMANCE.



LT 2000

STEEL CABLE

BUILT FOR ACTION, THE LT2000 WINCH FROM SUPERWINCH PROVIDES UP TO 2,000 LBS OF RELIABLE PULLING POWER. THIS UTILITY/MULTI-PURPOSE WINCH FEATURES FREE-SPOOLING "PULL AND TURN" CLUTCH AND A HANDHELD 8' REMOTE CONTROL, PERFECT FOR A VARIETY OF USES. PERFECTED OVER THE YEARS, THE LT SERIES OFFER UNMATCHED DURABILITY AND PERFORMANCE.



FEATURES:

- RATED LINE PULL OF 2,000 LBS
- SEALED 1.0 HP PERMANENT MAGNET MOTOR
- 1-STAGE PLANETARY GEARING WITH 153:1 RATIO
- CIRCUIT BREAKER PROTECTED
- FREE-SPOOLING, PULL AND TURN CLUTCH
- WIRE ROPE MEASURES 5/32" x 50'
- PERMANENT/LATCHED HOOD
- ZINC PLATED 4-WAY ROLLER FAIRLEAD
- HANDLE BAR MOUNTED ROCKER SWITCH

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1120210

SPECIFICATIONS	
SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	AUTOMATIC, 100% LOAD HOLDING
CABLE DIAMETER" (MM)	5/32" (3.9)
WEIGHT INSTALLED LBS (KG)	14.2 (6.44)

PERFORMANCE		
NO LOAD	AMPS	10
	LINE SPEED FPM (MPM)	10 (3.0)
AT LOAD	AMPS	100
	LINE SPEED FPM (MPM)	2.5 (0.8)

LT 3000

STEEL CABLE

LT3000 IS LEGENDARY BECAUSE IT SURVIVES PULL AFTER PULL, SEASON AFTER SEASON. BUILT FOR ACTION, THE LT3000 WINCH FROM SUPERWINCH PROVIDES UP TO 3,000 LBS OF RELIABLE PULLING POWER. INDUSTRIAL-STYLE REMOTE CONTROL AND PULL AND TURN FREESPOOL LEVER ARE STANDARD FEATURES AND OFFER GREAT VALUE, DURABILITY AND EASE OF OPERATION.



FEATURES:

- RATED LINE PULL OF 3,000 LBS
- SEALED 1.2 HP PERMANENT MAGNET MOTOR
- 3-STAGE PLANETARY GEARING WITH 136:1 RATIO
- SEALED SOLENOID, CIRCUIT BREAKER PROTECTED
- FREE-SPOOLING, ERGONOMIC CONTROL CLUTCH
- WIRE ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOD
- ZINC PLATED 4-WAY ROLLER FAIRLEAD
- 12' HAND-HELD REMOTE WITH HANDLEBAR MOUNTED ROCKER SWITCH

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1130220

SPECIFICATIONS	
SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	AUTOMATIC, 100% LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (4.8)
WEIGHT INSTALLED LBS (KG)	20 (9.0)

PERFORMANCE		
NO LOAD	AMPS	15
	LINE SPEED FPM (MPM)	23 (7.0)
AT LOAD	AMPS	180
	LINE SPEED FPM (MPM)	4.0 (1.2)

LT 4000

STEEL CABLE

BUILT FOR ACTION, THE LT4000 WINCH FROM SUPERWINCH PROVIDES UP TO 4,000 LBS OF RELIABLE PULLING POWER. THE LT4000 IS A GREAT CHOICE FOR A QUALITY, WELL-BUILT WINCH THAT DELIVERS A POWERFUL PULL SEASON AFTER SEASON. TRIED AND TRUE DESIGNS, PERFECTED OVER THE YEARS, THE LT SERIES OFFER UNMATCHED DURABILITY AND PERFORMANCE.



FEATURES:

- RATED LINE PULL OF 4,000 LBS
- SEALED 1.4 HP PERMANENT MAGNET MOTOR
- 3-STAGE PLANETARY GEARING WITH 166:1 RATIO
- SEALED SOLENOID, CIRCUIT BREAKER PROTECTED
- FREE-SPOOLING, ERGONOMIC CONTROL CLUTCH
- WIRE ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- ZINC PLATED 4-WAY ROLLER FAIRLEAD
- 12' HAND-HELD REMOTE WITH HANDLEBAR MOUNTED ROCKER SWITCH

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1140220

SPECIFICATIONS

SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	AUTOMATIC, 100% LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (4.8)
WEIGHT INSTALLED LBS (KG)	25

PERFORMANCE

NO LOAD	AMPS	
		20
	LINE SPEED FPM (MPM)	18 (5.4)
AT LOAD	AMPS	
		320
	LINE SPEED FPM (MPM)	4.5 (13)

LT 4000SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 4,000 LBS
- SEALED 1.4 HP PERMANENT MAGNET MOTOR
- 3-STAGE PLANETARY GEARING WITH 166:1 RATIO
- SEALED SOLENOID, CIRCUIT BREAKER PROTECTED
- FREE-SPOOLING, ERGONOMIC CONTROL CLUTCH
- SYNTHETIC ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- ALUMINUM HAWSE FAIRLEAD
- 12' HAND-HELD REMOTE WITH HANDLEBAR MOUNTED ROCKER SWITCH

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1140230

SPECIFICATIONS

SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	AUTOMATIC, 100% LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (4.8)
WEIGHT INSTALLED LBS (KG)	25

PERFORMANCE

NO LOAD	AMPS	
		20
	LINE SPEED FPM (MPM)	18 (5.4)
AT LOAD	AMPS	
		320
	LINE SPEED FPM (MPM)	4.5 (13)





UT 3000

STEEL CABLE

THE SUPERWINCH UT3000 WINCH PROVIDES 3,000 LBS OF PULLING CAPACITY, FREESPOOL CONTROL AND CABLE TENSIONER TO KEEP YOUR CABLE WRAP TIGHT. CONTROLLER AND ROLLER FAIRLEAD ON A MOUNT PLATE MAKES THIS WINCH A GREAT CHOICE FOR SIMPLE JOBS AROUND THE HOUSE OR WORKSITE.



FEATURES:

- RATED LINE PULL OF 3,000 LBS
- 1.2 HP PERMANENT MAGNET MOTOR PROVIDES DYNAMIC BRAKING
- 1-STAGE PLANETARY GEARING WITH 153:1 RATIO
- CIRCUIT BREAKER PROTECTED
- FREE-SPOOLING, PULL AND TURN CLUTCH
- WIRE ROPE MEASURES 3/16" X 40'
- CLEVIS PINNED HOOK
- ZINC PLATED 4-WAY FAIRLEAD
- 12' WIRED HAND-HELD REMOTE

MECHANICAL WARRANTY: LIMITED 1 YEAR
ELECTRONIC WARRANTY: LIMITED 1 YEAR

PART NO. 1331200

SPECIFICATIONS	
SOLENOID	CIRCUIT BREAKER PROTECTED
BRAKE	DYNAMIC
CABLE DIAMETER" (MM)	5/16" (7.9)
WEIGHT INSTALLED LBS (KG)	19.5 (8.84)

PERFORMANCE		
NO LOAD	AMPS	5
	LINE SPEED FPM (MPM)	8.5 (2.58)
AT LOAD	AMPS	110
	LINE SPEED FPM (MPM)	2.2 (0.6)

For California Residents Only-Prop. 65 Warning
WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov

TERRA SERIES

25 WINCH / 35 WINCH / 45 WINCH

WORLD'S BEST POWERSPORTS WINCH! THE SUPERWINCH TERRA SERIES IS THE STANDOUT PERFORMER IN ATV/UTV WINCHING. IT'S NOT A CLAIM WE MAKE LIGHTLY AND WE BACK IT UP WITH STRONGER MOTORS, BEEFED UP DRUMS AND DURABLE STEEL OR SYNTHETIC ROPE. BOTTOM LINE... LOWER AMP DRAW AND FASTER LINE SPEEDS. AVAILABLE IN 2,500/3,500/4,500 CAPACITY.





TERRA 25

STEEL CABLE

THE SUPERWINCH TERRA 25 IS THE STANDOUT PERFORMER IN POWERSPORTS ATV/UTV WINCHING. IT'S NOT A CLAIM WE MAKE LIGHTLY AND WE BACK IT UP WITH STRONGER MOTORS, WIDER GEARS, BEEFED UP DRUMS AND DURABLE STEEL CABLE. DESIGNED WITH THE TOUGHEST TERRAINS IN MIND, THIS SERIES OF ATV AND SIDE BY SIDE WINCHES, DELIVERS A PULL RATING OF 2,500 LBS. FEATURES RUGGED ALL METAL 3-STAGE PLANETARY GEAR TRAIN CONSTRUCTION.



FEATURES:

- RATED LINE PULL OF 2,500 LBS
- 1.3 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 140:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL HNOB
- WIRE ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- NARROW DRUM ALLOWS EASIER MOUNTING IN TIGHT SPACES

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 7 YEAR

PART NO. 1125220

SPECIFICATIONS	
SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (9.5)
WEIGHT INSTALLED LBS (KG)	18 (8.2)

PERFORMANCE		
NO LOAD	AMPS	25
	LINE SPEED FPM (MPM)	26 (7.9)
AT LOAD	AMPS	162
	LINE SPEED FPM (MPM)	10.5 (3.2)

TERRA 25SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 2,500 LBS
- 1.3 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 140:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL HNOB
- SYNTHETIC ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- NARROW DRUM ALLOWS EASIER MOUNTING IN TIGHT SPACES

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 3 YEAR

PART NO. 1125230

SPECIFICATIONS	
SOLENOID	V54 (SEALED SUBMERSIBLE VENTED)
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (9.5)
WEIGHT INSTALLED LBS (KG)	15 (6.8)

PERFORMANCE		
NO LOAD	AMPS	25
	LINE SPEED FPM (MPM)	26 (7.9)
AT LOAD	AMPS	162
	LINE SPEED FPM (MPM)	10.5 (3.2)



TERRA 35

STEEL CABLE

THE SUPERWINCH TERRA 35 IS THE STANDOUT PERFORMER IN POWERSPORTS ATV/UTV WINCHING. IT'S NOT A CLAIM WE MAKE LIGHTLY AND WE BACK IT UP WITH STRONGER MOTORS, WIDER GEARS, BEEFED UP DRUMS AND DURABLE STEEL CABLE. TERRA 35 WINCHES COME STOCK WITH BOTH A 10' SEALED HANDHELD REMOTE AS WELL AS A SEALED HANDLE BAR MOUNTED ROCKER SWITCH. FEATURES GEARS THAT ARE 2X AS WIDE AS THE NEXT COMPETITOR. THIS MEANS FAR BETTER ENGAGEMENT PLUS LONGER LIFE.



FEATURES:

- RATED LINE PULL OF 3,500 LBS
- 1.6 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 140:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL KNOB
- WIRE ROPE MEASURES 7/32" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOD
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- NARROW DRUM ALLOWS EASIER MOUNTING IN TIGHT SPACES

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 3 YEAR

PART NO. 1135220

SPECIFICATIONS

SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	13/64" (5.2)
WEIGHT INSTALLED LBS (KG)	20 (9.1)

PERFORMANCE

NO LOAD	AMPS	19
	LINE SPEED FPM (MPM)	24 (7.3)
AT LOAD	AMPS	190
	LINE SPEED FPM (MPM)	10.2 (3.1)

TERRA 35SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 3,500 LBS
- 1.6 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 140:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL KNOB
- SYNTHETIC ROPE MEASURES 3/16" x 50'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOD
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- NARROW DRUM ALLOWS EASIER MOUNTING IN TIGHT SPACES

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 3 YEAR

PART NO. 1135230

SPECIFICATIONS

SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	3/16" (4.8)
WEIGHT INSTALLED LBS (KG)	17 (7.7)

PERFORMANCE

NO LOAD	AMPS	19
	LINE SPEED FPM (MPM)	24 (7.3)
AT LOAD	AMPS	190
	LINE SPEED FPM (MPM)	10.2 (3.1)





TERRA 45

STEEL CABLE

THE SUPERWINCH TERRA 45 IS THE STANDOUT PERFORMER IN POWERSPORTS ATV/UTV WINCHING. IT'S NOT A CLAIM WE MAKE LIGHTLY AND WE BACK IT UP WITH STRONGER MOTORS, WIDER GEARS, BEEFED UP DRUMS AND DURABLE STEEL CABLE. TERRA 45 WINCHES ARE THE INDUSTRY'S FIRST TRULY SEALED UTILITY TERRAIN VEHICLE WINCH ASSEMBLY. ALL SEALS ON THE ENTIRE WINCH FROM THE OUTMOST END OF THE MOTOR TO THE ERGONOMIC FREE SPOOL CONTROL KNOB ALL MEET THE IP67 RATING. THE 10' HANDHELD REMOTE AND THE SOLENOID ARE SEALED AT THIS SAME TOUGH STANDARD WHICH ENSURES TO KEEP OUT WATER, MUD, SNOW AND DUST.



FEATURES:

- RATED LINE PULL OF 4,500 LBS
- 1.6 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 191:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL KNOB
- WIRE ROPE MEASURES 1/4" x 55'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- WIDE DRUM ADDS ROPE CAPACITY

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 3 YEAR

PART NO. 1145220

SPECIFICATIONS	
SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	1/4" (6.5)
WEIGHT INSTALLED LBS (KG)	22 (10)

PERFORMANCE		
NO LOAD	AMPS	21
	LINE SPEED FPM (MPM)	15 (4.6)
AT LOAD	AMPS	178
	LINE SPEED FPM (MPM)	4.5 (13)

TERRA 45SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 4,500 LBS
- 1.6 HP PERMANENT MAGNETIC MOTOR
- 3-STAGE PLANETARY GEARING WITH 191:1 RATIO
- SEALED SOLENOID WITH CIRCUIT BREAKER
- EASY TO ENGAGE ERGONOMIC FREESPOOL CONTROL KNOB
- SYNTHETIC ROPE MEASURES 1/4" x 55'
- HEAVY-DUTY, CLEVIS PINNED, LATCHED HOOK
- BLUE ANODIZED ALUMINUM HAWSE FAIRLEAD
- 10' RUGGED HANDHELD REMOTE CONTROL WITH HANDLEBAR MOUNTED ROCKER SWITCH
- WIDE DRUM ADDS ROPE CAPACITY

MECHANICAL WARRANTY: LIMITED LIFETIME
ELECTRONIC WARRANTY: LIMITED 3 YEAR

PART NO. 1145230

SPECIFICATIONS	
SOLENOID	SEALED, CIRCUIT BREAKER PROTECTED
BRAKE	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER" (MM)	1/4" (6.5)
WEIGHT INSTALLED LBS (KG)	19 (8.6)

PERFORMANCE		
NO LOAD	AMPS	21
	LINE SPEED FPM (MPM)	15 (4.6)
AT LOAD	AMPS	178
	LINE SPEED FPM (MPM)	4.5 (13)

WINCH2GO

STEEL WINCH / SYNTHETIC WINCH

SUPERWINCH

WARNING

• Pinch Point •
• Keep Hands
• Away



HAVE IT ALL. A WINCH FOR FOLKS ON THE MOVE. GOES FROM CAR TO SNOWMACHINE TO ATV TO WHEREVER YOU CAN DREAM UP NEXT. COMES WITH ALL THE GEAR YOU NEED FROM SNATCH BLOCKS, STRAPS, SHACKLES OR EVEN A PAIR OF GLOVES. 4,000 LBS CAPACITY AND CHOICE OF STEEL CABLE OR SYNTHETIC ROPE.



WINCH2GO STEEL ROPE

STEEL CABLE

THIS "WINCH IN A BOX" OFFERS A VARIETY OF USES FOR HOME, WORK, ROAD OR PLAY. WINCH2GO COMES COMPLETE WITH ALL THE GEAR AND ACCESSORIES YOU NEED FROM SNATCH BLOCK, STRAPS, SHACKLES AND EVEN A PAIR OF WINCH GLOVES. NEVER GET STRANDED AGAIN, REGARDLESS OF WEATHER OR TERRAIN WINCH2GO ONLY NEEDS A BASIC ANCHOR POINT FOR RECOVERY, IF THERE IS A ROCK, OR TREE, OR VEHICLE TO TIE TO, WINCH2GO CAN DO THE REST. FEATURES A QUICK CONNECT POWER CORD AND AN 8,000 LBS SNATCH BLOCK.



FEATURES:

- RATED LINE PULL OF 4,000 LBS
- 1.4 HP PERMANENT MAGNET MOTOR
- CAM ACTION KNOB FREESPOOL CLUTCH
- WIRE ROPE MEASURES 7/32" X 40'
- SEALED HANDHELD WIRED REMOTE
- STEEL BASE PLATE WITH INTEGRATED HAWSE
- 1/4" CLEVIS PINNED, LATCHED HOOD
- 12' HANDHELD REMOTE CONTROL
- (2) HEAVY DUTY 8' STRAPS RATED AT 4,000 LBS
- (3) 4,000 LBS D-SHACKLES
- 8,000 LBS SNATCH BLOCK
- 10' QUICK CONNECT BATTERY CABLES
- PAIR OF HEAVY DUTY WINCH GLOVES
- WEIGHS 43 LBS

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1140222

SPECIFICATIONS	
FREESPOOL CLUTCH	CAM ACTION KNOB
SWITCHING METHOD	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER"	7/32"
WEIGHT INSTALLED LBS (KG)	43 (19.5)

PERFORMANCE		
NO LOAD	AMPS	20
	LINE SPEED FPM (MPM)	20 (76.0)
AT LOAD	AMPS	220
	LINE SPEED FPM (MPM)	5.5 (1.6)

WINCH2GO SR

SYNTHETIC ROPE



FEATURES:

- RATED LINE PULL OF 4,000 LBS
- 1.4 HP PERMANENT MAGNET MOTOR
- CAM ACTION KNOB FREESPOOL CLUTCH
- SYNTHETIC ROPE MEASURES 7/32" X 40'
- SEALED HANDHELD WIRED REMOTE
- STEEL BASE PLATE WITH INTEGRATED HAWSE
- 1/4" CLEVIS PINNED, LATCHED HOOD
- 12' HANDHELD REMOTE CONTROL
- (2) HEAVY DUTY 8' STRAPS RATED AT 4,000 LBS
- (3) 4,000 LBS D-SHACKLES
- 8,000 LBS SNATCH BLOCK
- 10' QUICK CONNECT BATTERY CABLES
- PAIR OF HEAVY DUTY WINCH GLOVES
- WEIGHS 41 LBS

MECHANICAL WARRANTY: LIMITED 2 YEAR
ELECTRONIC WARRANTY: LIMITED 2 YEAR

PART NO. 1140232

SPECIFICATIONS	
FREESPOOL CLUTCH	CAM ACTION KNOB
SWITCHING METHOD	MECHANICAL, AUTOMATIC, LOAD HOLDING
CABLE DIAMETER"	7/32"
WEIGHT INSTALLED LBS (KG)	41 (19.5)

PERFORMANCE		
NO LOAD	AMPS	20
	LINE SPEED FPM (MPM)	20 (76.0)
AT LOAD	AMPS	220
	LINE SPEED FPM (MPM)	5.5 (1.6)

RECOVERY ACCESSORIES

BFR RECOVERY ROPE / TOW STRAP / BOW SHACKLE / CLEVIS HOOK / ATV WINCH ACCESSORIES



BFR RECOVERY ROPE KIT SHOWN



WESTIN RECOVERY ACCESSORIES

BFR RECOVERY ROPE KIT

PART NO. 47-3608



RECOVERY ACCESSORY KIT

PART NO. 47-3200



**TREE TRUCK PROTECTOR
(3" X 10')**



PART NO. 47-3215

**TOW STRAP
(2.5" X 30')**



PART NO. 47-3213

**TOW STRAP
(3" X 30')**



PART NO. 47-3215

RECEIVER BOW SHACKLE KIT



PART NO. 47-3205

**BOW SHACKLE
3/4" - RATED 9,500 LBS**



PART NO. 47-3204

**CLEVIS HOOK - RATED
SINGLE LIN PULL
UP TO 10,000 LBS**



PART NO. 47-3208

**SYNTHETIC ROPE
25/64" X 94"**



PART NO. 47-3604

**PORTABLE
COMPRESSOR**



PART NO. 47-3850

WESTIN ATV WINCH ACCESSORIES

**ATV/UTV RECOVERY
ACCESSORY KIT**

PART NO. 47-3201



**QUICK DISCONNECT
WIRING KIT - 24'**



PART NO. 47-3532

WINCH MOUNTING PRODUCTS

HXD WINCH MOUNT GRILLE GUARD / MAX WINCH TRAY / **WJ2** FRONT BUMPERS



HDX WINCH MOUNT GRILLE GUARD

Westin's HDX Winch Mount Grille Guard is Xtreme Truck Gear for the enthusiast that seeks additional functionality for their truck. It encompasses all of the features of an HDX Grille Guard with the additional capability to hold a winch up to 10.25 inches tall with a rating of up to 12,000 lbs. Winch trays are tested and capability confirmed to a minimum straight line pull of 16,500 lbs. HDX Winch Mount Grille Guards are available in 304 stainless steel backed by a lifetime warranty and black powder coat steel backed by a 3 year warranty.

TIGER SHARK 11500SR SYNTHETIC WINCH
SHOWN ON HDX WINCH MOUNT GRILLE GUARD



WESTIN WINCH MOUNTING PRODUCTS

HDX WINCH MOUNT GRILLE GUARD



FEATURES:

- MOUNT HIT INCLUDED
- 1-PIECE WELDED UPRIGHTS
- 2" TUBE FULL WRAPAROUND WINGS
- FULL PUNCH PLATE GRILLE
- HEAVY DUTY TRAY BRACHETS MOUNT DIRECTLY TO THE VEHICLE FRAME
- WINCH TRAYS TESTED TO A MINIMUM STRAIGHT LINE PULL OF 16,500 LBS
- FITS MOST MEDIUM FRAME 8,000 - 12,500 LBS WINCHES (UP TO 10 1/4" TALL)
- AVAILABLE IN STAINLESS STEEL AND BLACK POWDER COAT

OPTIONAL PRODUCTS: HDX B-FORCE FLUSH MOUNT HIT



PART NO. 57-0025

(6" LENGTHS)

PART NO. 57-0035

(10" LENGTHS)

MAX WINCH TRAY



FEATURES:

- HEAVY DUTY BRACHETS MOUNT DIRECTLY TO THE VEHICLE FRAME
- WINCH TRAYS TESTED TO A MINIMUM STRAIGHT LINE PULL OF 16,500 LBS
- FITS MOST MEDIUM FRAME 8,000 - 12,500 LBS WINCHES (UP TO 10 1/4" TALL)
- PRE-DRILLED FOR QUICK MOUNTING OF HAWSE OR ROLLER FAIRLEAD
- OPTIONAL MAX BULL BAR/LIGHT BAR - SOLD SEPARATELY
- OPTIONAL MAX FACEPLATE - SOLD SEPARATELY
- OPTIONAL MAX TOW HOOKS - SOLD SEPARATELY

MAX WINCH TRAY MOUNTING SYSTEM

1. MAX BULL BAR/LIGHT BAR
OPTIONAL

2. MAX FACEPLATE
OPTIONAL

3. MAX TOW HOOK
(1 UNIT PER PACKAGE)
OPTIONAL

PART NO. 46-3005



RECEIVER MOUNT QUICK RELEASE

PART NO. 47-3100



JEEP WRANGLER TJ WINCH MOUNT

PART NO. 47-3104




JEEP WRANGLER JK WINCH MOUNT

PART NO. 47-3106



WESTIN WJ2 FRONT BUMPERS FOR JEEP JK AND JL

WJ2 STUBBY BUMPER WITH LED LIGHT MOUNT

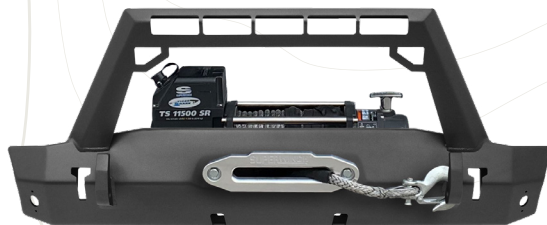

FEATURES:

- 3/16" PLATE STEEL CONSTRUCTION
- LED LIGHT BAR MOUNT FITS MOST 20" SINGLE ROW LIGHT BAR*
- DESIGNED TO ALLOW WINCH INSTALLATION WITH BUMPER INSTALLED
- 2 SIDE AND 2 FRONT OFF-ROAD JACK POINTS
- ROCK LIGHT MOUNT POINTS ON LOWER BUMPER CORNERS
- OPTIONAL SHID PLATE AVAILABLE - SOLD SEPARATELY
- BOLT-ON INSTALLATION - NO DRILLING REQUIRED

*20" LED LIGHT BAR SOLD SEPARATELY

WJ2 FULL WIDTH FRONT BUMPER WITH BULL BAR



FEATURES:

- 3/16" PLATE STEEL CONSTRUCTION
- BULL BAR DESIGNED TO MOUNT MOST DOUBLE OR SINGLE ROW 20" LIGHT BARS*
- DESIGNED TO ALLOW WINCH INSTALLATION WITH BUMPER INSTALLED
- 2 FRONT OFF-ROAD JACK POINTS
- FACTORY FOG LIGHTS COMPATIBLE
- ROCK LIGHT MOUNT POINTS ON LOWER BUMPER CORNERS
- OPTIONAL SHID PLATE AVAILABLE - SOLD SEPARATELY
- BOLT-ON INSTALLATION - NO DRILLING REQUIRED

*20" LED LIGHT BAR SOLD SEPARATELY



For California Residents Only-Prop. 65 Warning
WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov

ENGINEERED FOR ENTHUSIASTS



A WORD FROM OUR PRESIDENT





"WE ARE VERY EXCITED AT THE OPPORTUNITY TO ADD SUPERWINCH'S QUALITY PRODUCTS INTO OUR OVERALL WESTIN PROGRAM. WE KNOW THAT BOTH SUPERWINCH AND WESTIN CUSTOMERS WILL BENEFIT FROM THE EXPANDED PRODUCT LINES, MARKETING AND CUSTOMER SERVICE THAT OUR CUSTOMERS EXPECT FROM US. THIS OPPORTUNITY IS CONSISTENT WITH OUR REPUTATION OF BRINGING THE BROADEST RANGE OF TOP QUALITY INNOVATIVE PRODUCTS FOR CONSUMER AND COMMERCIAL APPLICATIONS TO THE AUTOMOTIVE AFTERMARKET SINCE 1977".

BOB WEST – PRESIDENT, SUPERWINCH/WESTIN AUTOMOTIVE



CUSTOMER SERVICE

PH: 800.323.2031

E-MAIL: INFO@SUPERWINCH.COM

7AM-4PM PST



SEARCH #SUPERWINCH
AND STAY CONNECTED!



320 W. COVINA BLVD. SAN DIMAS, CA 91773

5.4606 / 5W01 / 080619

©2019 SUPERWINCH. PRINTED IN U.S.A.

SUPERWINCH.COM



For California Residents Only-Prop. 65 Warning

WARNING: Some products may contain chemicals such as DEHP, which can cause cancer, birth defects or other reproductive harm. For more info go to www.p65warnings.ca.gov

WESTIN